


# **blokart® Batten Retainer Cap**


## **Fitting Instructions**




① Using the 5 x 200mm length of 2.8mm bungee cord supplied.

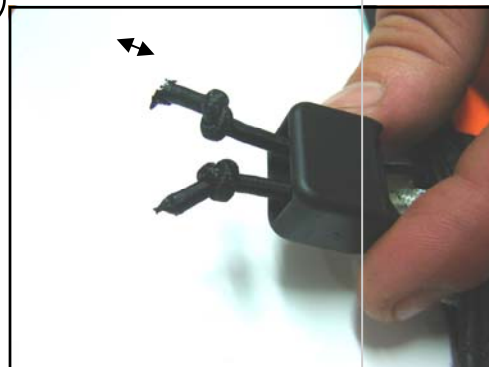

④ Both ends of the bungee are knotted with a similar 8-10mm tail.

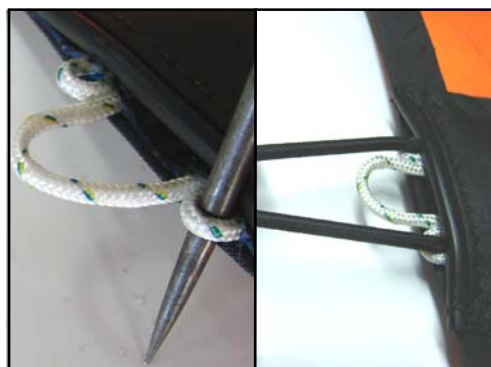

② Thread the bungee through the loops of the white cord from the back, you may need to open the loops with a tapered tool.

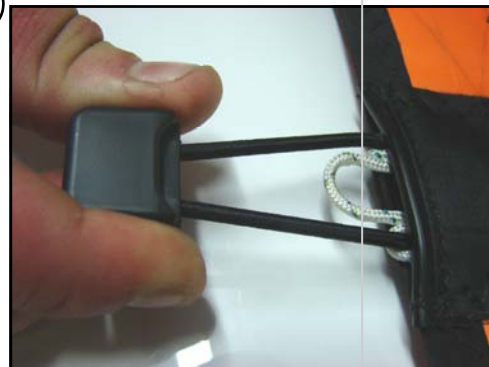

⑤ Pull the retainer cap to tighten the knots seating them into the recess in the cap.



③ Thread the bungee through the holes in the retainer cap and tie a knot.



⑥ The retainer is ready for the batten to be inserted into the pocket.



[www.blokart.com](http://www.blokart.com)

blokart® International recommends to double locate the bungee on the batten end as pictured.



NB. The blokart® batten retainer cap allows for personal tuning options. Lengthen the bungee tails behind the knots to increase the batten tension.